


How To Synchronize A BlackBerry OS10 Calendar Using The MDAemon CalDAV Service


With the release of MDAemon v15.5.0 users can now sync their BlackBerry (OS10) calendar with MDAemon using MDAemon’s new CalDAV service.

Follow the below instructions to configure calendar and/or task sync’ing on BlackBerry devices running OS10. Instructions are shown using a BB Q10.


1. Touch Settings and then Accounts.

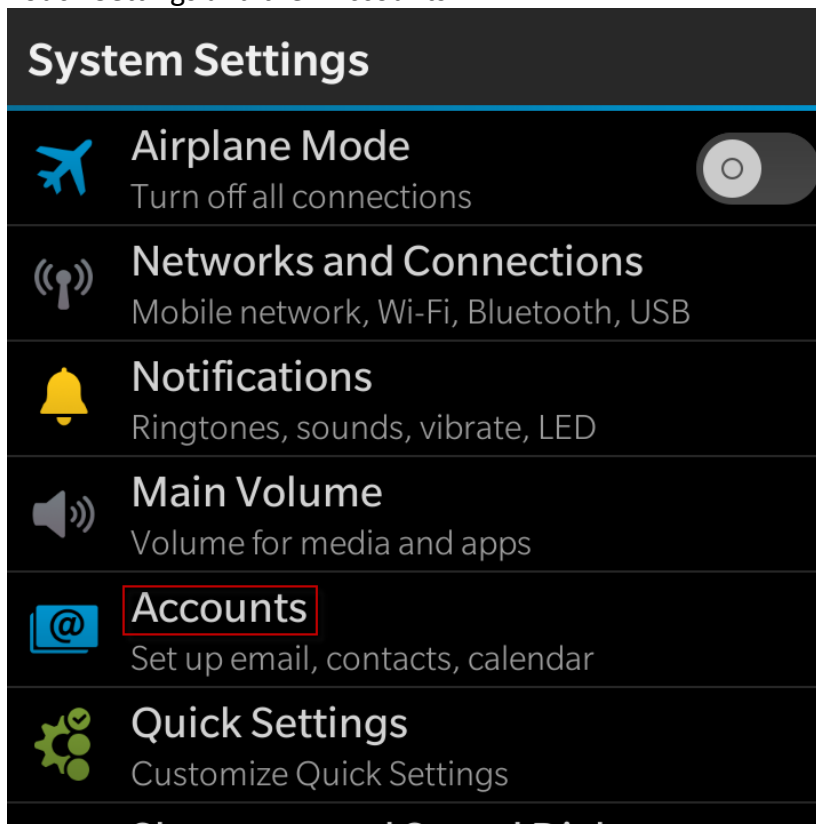


2. Touch Add Account.

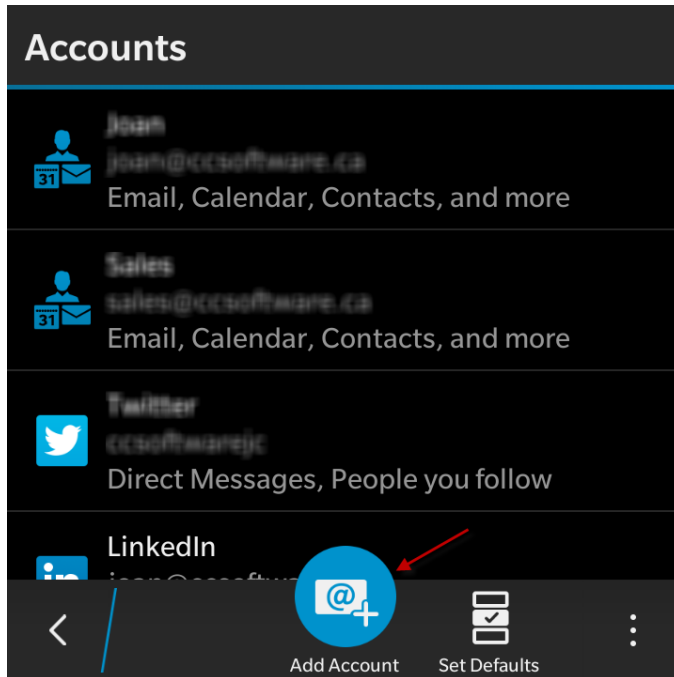

3. Touch Advanced at the bottom of the screen.

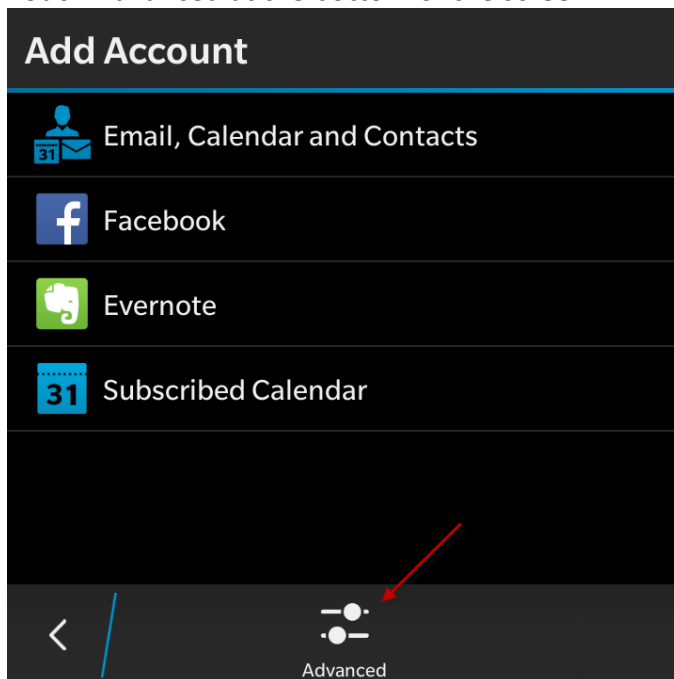

4. Touch CalDAV.

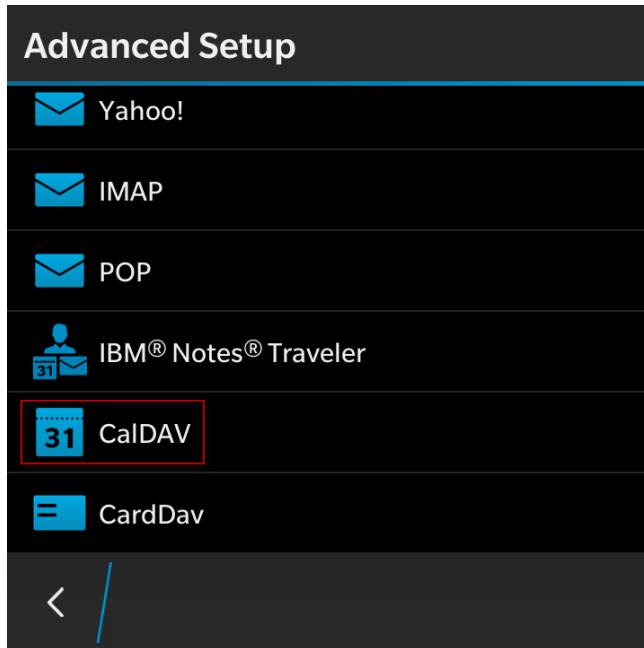

5. Enter a Description for the calendar, Username, email address, password, and the server address. Please see the URL syntax to use based on the type of calendar you would like to sync. Touch Done in the top right hand corner to complete the account set up.

The screenshot shows a dark-themed 'CalDAV' setup form. At the top, there's a title bar with 'Dismiss', 'CalDAV', and 'Done' buttons. Below it, there are several input fields: 'Email Address' with the text 'user@example.com', 'Password *' with a masked password '.....' and a toggle icon, and 'Server Address *' with the text 'http://mail.example.com/webdav/calendar/' and a clear icon. At the bottom, there are two dropdown menus: 'Sync Interval' set to '30 Minutes' and 'Sync Past Events' set to '3 Months'.

Calendar URL Syntax

Private Calendars

<http://<server host name>/webdav/calendar/> - the user's primary calendar

<http://<server host name>/webdav/calendar/schedule/> - a user's calendar called "schedule" in their root directory.

<http://<server host name>/webdav/calendar/calendar/schedule/> - the calendar named "schedule" is a sub-calendar of the user's primary calendar.

Shared Calendars

<http://<server host name>/webdav/calendars/example.com/user> - user@example.com's default calendar.

<http://<server host name>/webdav/calendars/example.com/user/test/> - user@example.com's calendar named "test".

Public Folder Calendars

<http://<server host name>/webdav/public-calendars/example.com> - the domain example.com's default public calendar.

<http://<server host name>/webdav/public-calendars/events/> - calendar called "events" in the root of the public folder hierarchy.

The examples given were formed using HTTP. Replace with HTTPS if your MDaemon server is set up to support HTTPS connections.